

**PVDF-BASED COATINGS VERSUS
POLYESTER POWDER AND OTHER COATINGS**

Case Studies in Performance

NO FADING

NO CHALKING

COLOR RETENTION

GLOSS RETENTION

Test Panels on Exposure at Arkema's Sub-Tropical Exposure Station

THE TRUTH IS ON THE TEST FENCE.

Metal has rapidly become the material of choice for exterior use due to its rugged durability, design versatility and aesthetic possibilities. However, for all its bravado and beauty, metal doesn't necessarily have a tough skin and is only available in a single color. To be both functional and decorative, metal must be coated with a finish that beautifies with color and doesn't chalk; that won't lose its color and sheen; that won't pit, chip or age before its time.

Kynar 500® resin-based finishes are available worldwide through a strict licensing program. This licensed distribution ensures the quality, consistency and high performance of Kynar 500® resin-based coatings.

PERFORMANCE TESTING

Objective

To measure and compare the performance of Kynar 500® resin-based coating systems with competitive coatings for their resistance to weather.

Background

Panels coated with liquid Kynar 500® resin-based coatings and powder coated with other resin systems were exposed on a South Florida test fence for 10 to 17 years. The panels were evaluated periodically during exposure for chalk, gloss and color changes. See table below.

Conclusion

Kynar 500® resin-based coatings outperform polyester powder, urethane, silicone polyester and acrylic coatings in every category: better color retention, better resistance to chalking. The proof is in the pictures of the coated panels. Just compare the unexposed portion (top panels) with the exposed portion (bottom panels). Performance as promised. Time after time. Kynar 500® resin-based coatings.

FLORIDA EXPOSURE 45° SOUTH. 17 YEARS EXPOSURE.



Kynar 500®
Bronze



Polyester Powder
Bronze



Silicone Polyester
Bronze



Kynar 500®
Bronze



Acrylic
Bronze



Urethane
Bronze

FLORIDA EXPOSURE 45° SOUTH. 10 YEARS EXPOSURE.



Kynar 500®
Yellow



Polyester Powder
Yellow



Kynar 500®
Red







Polyester Powder
Orange



Kynar 500®
Bronze



Polyester Powder
Bronze

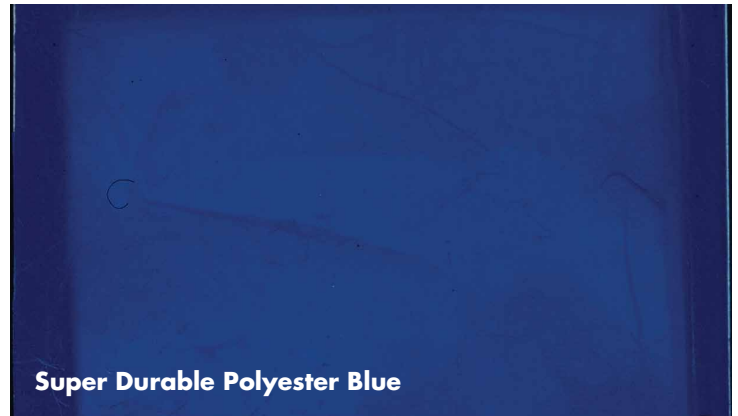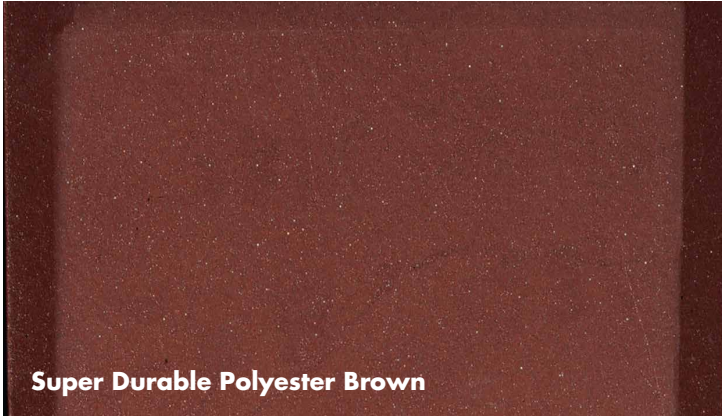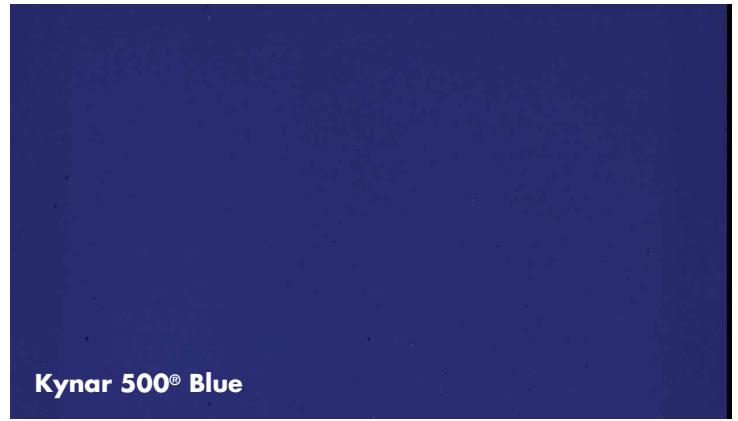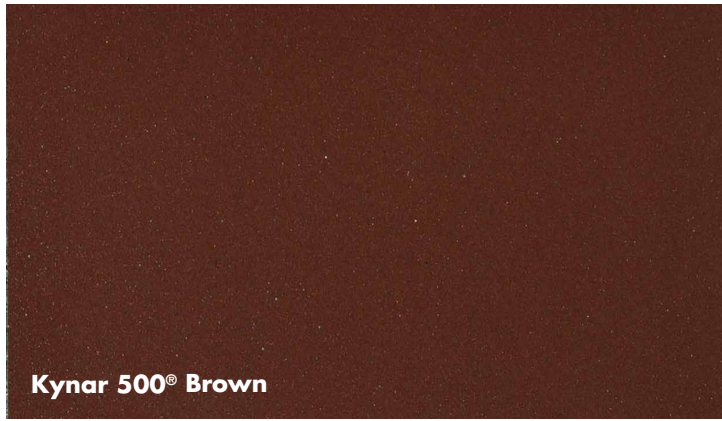

Kynar 500®-based coatings are typically solvent-based, but are often confused with powder coatings through the following question, “How does a Kynar 500®-based coating compare to a powder coating?” The easiest answer is that all coating systems, whether liquid or powder, contain a specific resin that acts as the first line of defense against weathering. Ultimately, the resin determines the durability. Kynar 500®-based coating is simply a resin commonly known as polyvinylidene fluoride. Other coating resins include acrylic, polyester, silicone polyester and urethane. In today’s market, liquid Kynar 500®-based coatings are the most common, but Kynar 500®-based coating is also available as

a powder coating. Whether you are looking for a liquid coating or a powder coating, the key to product performance is the resin chemistry. For the ultimate long-term durability, time has shown Kynar 500® PVDF resin is the one to choose.

In color-matched accelerated weathering tests, shown above, Kynar 500®-based coating panels clearly outperformed the latest “super durable polyester” powder technology. Contact us at www.kynar500.com for more information on Kynar 500®-based coatings.

PANEL NO.	DESCRIPTION	EXPOSURE TIME	ORIGINAL GLOSS 60°	FINAL GLOSS 60°	COLOR CHANGE	CHALK (EXPOSED) ASTM D-4214
1764	Kynar 500®, Bronze	17 years	31	8	6.71	8
1788	Silicone Polyester, Bronze	17 years	44	1	27.06	4
1789	Silicone Polyester, Bronze	17 years	34	1	36.11	4
1765	Kynar 500®, Bronze	17 years	30	10	8.74	8
1795	Acrylic, Bronze	17 years	26		coating worn to substrate	
1799	Urethane, Bronze	17 years	36	1	38.26	6
3157	Kynar 500®, Yellow	10 years	15	15	5.35	10
3156	Polyester Powder, Yellow	10 years	28	3	23.37	6
3161	Kynar 500®, Red	10 years	52	36	8.77	10
3160	Polyester Powder, Orange	10 years	34	1	24.66	6
3169	Kynar 500®, Bronze	10 years	43	22	4.79	10
3168	Polyester Powder, Bronze	10 years	38	1	10.91	6

CASE STUDY: TAIYO STEEL

In 1981 in Funabashi Japan, Taiyo Steel Co., Ltd. built a plant for their new coil coating line employing metal walls. A decision was made to make the south wall an industrial test fence, to evaluate the outdoor weatherability of Taiyo Steel's precoated metal products. Ten meter high steel panels were coated with acrylic, polyester, silicone polyester and Kynar 500® resin-based coatings.

In just two short years, there was a significant difference in color retention, gloss retention and chalk resistance between Kynar 500® resin-based coatings and other systems.

After fourteen years, the Kynar 500® resin-based coating was the only system that kept its original appearance, clearly outperforming the other coatings year-in and year-out.



CONTACT US AROUND THE WORLD

Arkema Inc.
900 First Ave
King of Prussia, PA 19406
Tel: 800 KYNAR 50

Arkema
420 rue Estienne d'Orves
92705 Colombes Cedex France
Tel: (+33) (0) 1 49 00 80 80

Arkema India Branch Office
4th Floor, Unit 4NE, The Ruby 29
Senapati Bapat Marg, Dadar
West - 400028,
Mumbai, India
Tel: 91 22 6613 7500

Arkema
10th floor, Building H,
Daning Music Plaza
No. 777 Wanrong Road,
Shanghai 200072, P.R. China
Tel: 86 21 6147 6888

Arkema K.K.
Fukoku Seimei Bldg 15F
2-2-2 Uchisaiwaicho
Chiyoda-Ku
Tokyo 100-011, Japan
Tel: 81 3 5251 9900

Arkema
7F, Dongsung Building, 17-8,
Yeouido-dong, Yeongdeungpo-
gu, Seoul, 150-874, Korea
Tel: 82 2 3703 6822

Arkema
Company Limited Taiwan Branch
8th/F-5, No.188, Sec.5
Nan-King E. Road
Taipei, Taiwan 10571
Tel: 886 2 2747 6979

Arkema Pte Ltd
1 Science Park Road
#04-01/05, The Capricorn
Singapore Science Park II,
Singapore 117528
Tel: 65 6419 9018

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.

The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations. Arkema has implemented a Medical Policy regarding the use of Arkema products in Medical Devices applications that are in contact with the body or circulating bodily fluids: (<http://www.arkema.com/en/social-responsibility/responsible-product-management/medical-device-policy/index.html>).

Kynar®, Kynar 500® and FSF® are a registered trademark of Arkema Inc.

© 2020 Arkema Inc. All rights reserved.

www.kynar500.com

Contact Information

China: +86 21 6147 6888
Japan: +81 3 5251 9900
Korea: +82 2 3703 6822
Singapore: +65 6419 9018
Taiwan: +886 2 2747 6979
India: +91 22 6613 7500

Arkema Inc.

900 First Avenue
King of Prussia, PA 19406
USA
Tel.: (+1) 610-205-7000

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 (0)1 49 00 80 80
Fax: +33 (0)1 49 00 83 96
arkema.com

ARKEMA
INNOVATIVE CHEMISTRY