
MCELROY METAL, INC




www.mcelroymetal.com

MCP Panel

Product Data



MCP PROFILE

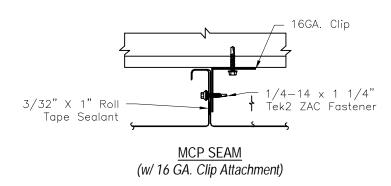

Applications

Concealed fastener canopy panel. Minimum length of 4'-0". Maximum length of 50'-0".

Substrates

Plywood, Hat Section, Mac-Girts, or Open Framing.

Material

Standard - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare AZ50 - Painted

Manufacturing

Roll formed in factory. (Sunnyvale Plant Only)

Finishes

Acrylic Coated Galvalume® Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

12" or 16" Flat Pan


Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

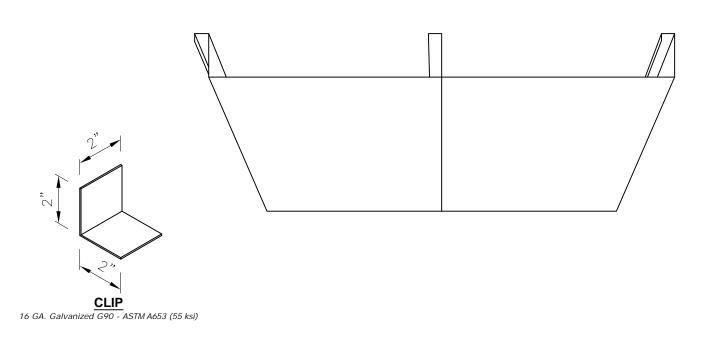

MCP PAGE 1 of 1