


Medallion I and Medallion II Panels

Product Data

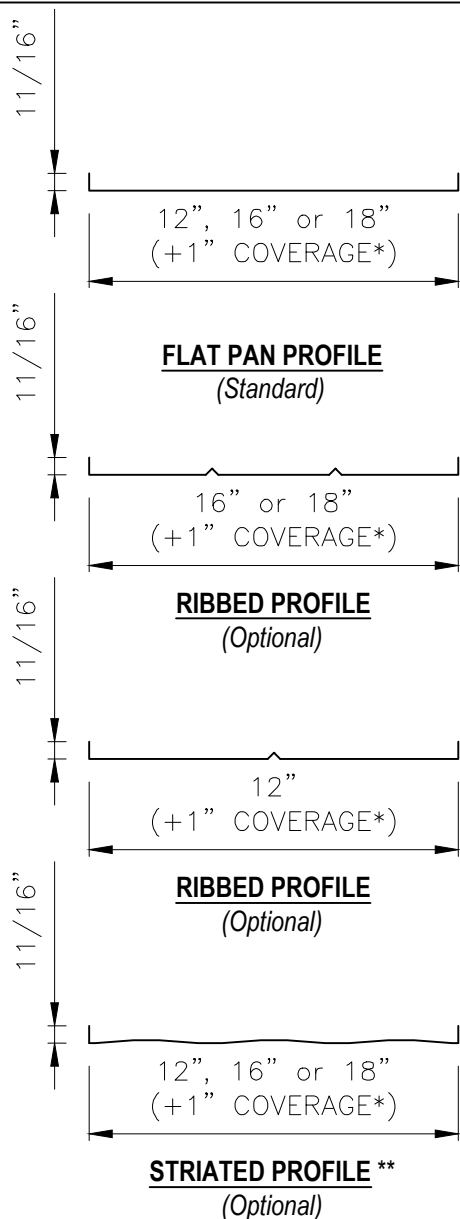

Applications

Concealed fastener and Batten Cap roof panel used on slopes down to 3:12. Continuous length up to 75'. Convex curving only – 30" minimum radius.

Substrates

Solid Wood Decking, Metal Deck or Rigid Insulation/Metal Deck.

Material

Standard – 24 GA. ASTM A792 (50 ksi steel)

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®

Fluoropolymer (Kynar 500® PVDF resin-based)

Panel Conditions

Striated, Pencil Rib, or Flat

Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

Testing *

Uplift: UL 580 Class 90

Air & Water Infiltration: ASTM E1680, ASTM E1646.

Fire Resistance: UL 263 & UL 790 Class A

Impact Resistance: UL 2218 Class 4

Florida Product Approval: (Medallion I) FL 1832.5 (non-structural)
(Medallion II) FL 1832.6 (non-structural)

Testing and Approvals are product specific. Please inquire for details.

NOTE:



All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

*NOTE:

+1" coverage to the Medallion II panel due to width of panel clip.


**NOTE:

Striated Panels cannot be curved.

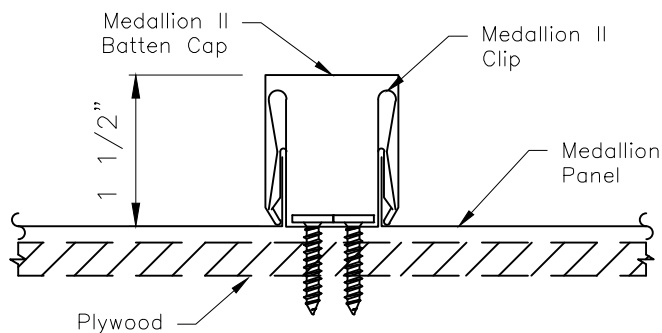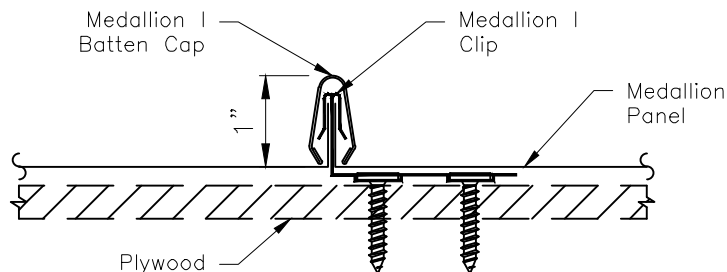


Medallion I and Medallion II Panels (Continued)

Product Data




MEDALLION I CLIP

26 GA. - ASTM A792 (50 ksi)

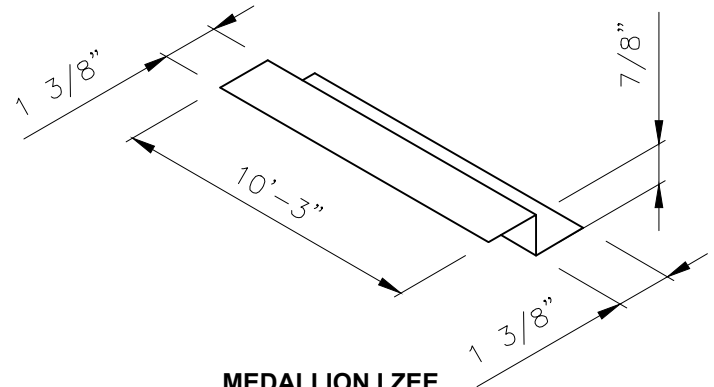


**MEDALLION I ZEE
CLOSURE**

26 GA. - ASTM A792 (50 ksi)

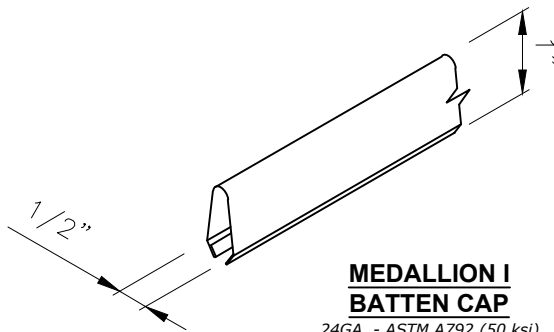


**MEDALLION I
BATTEN CAP**

24GA. - ASTM A792 (50 ksi)




MEDALLION II CLIP

26 GA. - ASTM A792 (50 ksi)

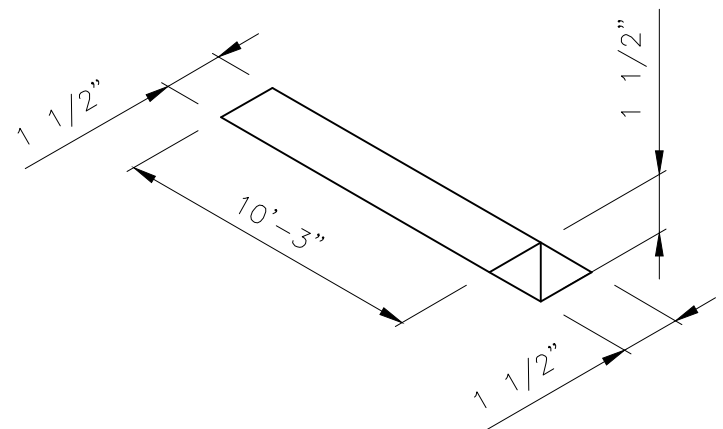

**MEDALLION II ZEE
CLOSURE**

26 GA. - ASTM A792 (50 ksi)

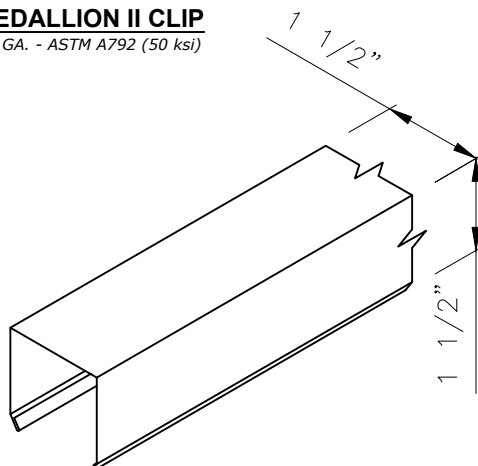

**MEDALLION II
BATTEN CAP**

24GA. - ASTM A792 (50 ksi)

Cannot Be Curved