


# WETTING OF CLIP DETAIL


APPLY A CONTINUOUS BEAD OF TUBE BUYTL OR 3/32" X 3/8" ROLL TAPE SEALANT UNDERNEATH CLIP FLANGE

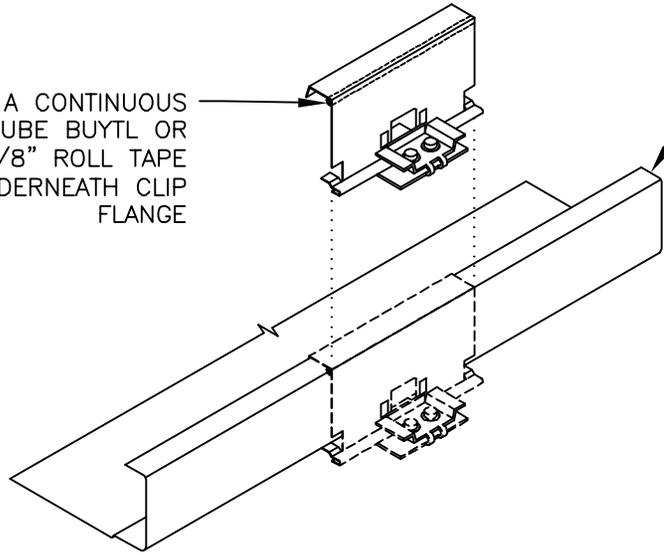

MAXIMA ADV PANEL

STEP #1

APPLY A CONTINUOUS BEAD OF TUBE BUYTL OR 3/32" X 3/8" ROLL TAPE SEALANT ALONG TOP OF MALE LEG AND CLIP

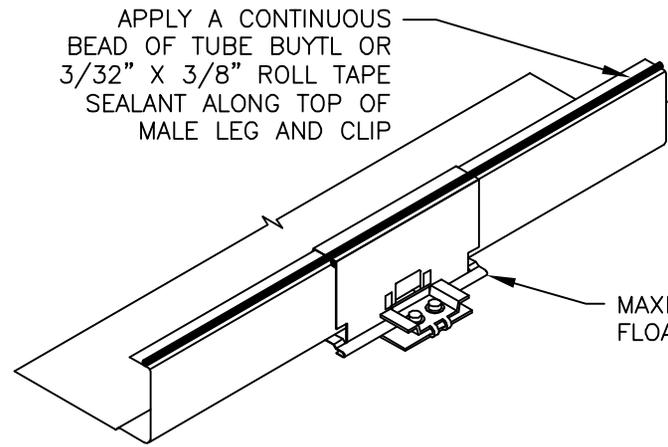


MAXIMA ADV PANEL

MAXIMA PANEL FLOATING CLIP


STEP #2

BEAD OF TUBE BUYTL OR 3/32" X 3/8" ROLL TAPE SEALANT CONT. ALONG TOP OF MALE LEG AND OVER TOP OF CLIP

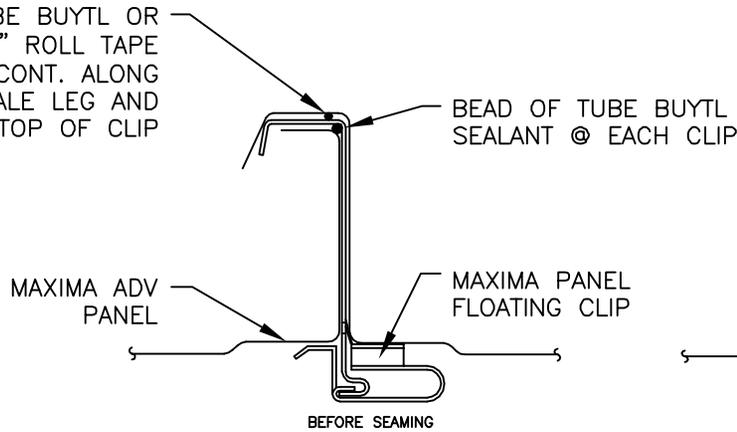

BEFORE SEAMING

BEAD OF TUBE BUYTL SEALANT @ EACH CLIP

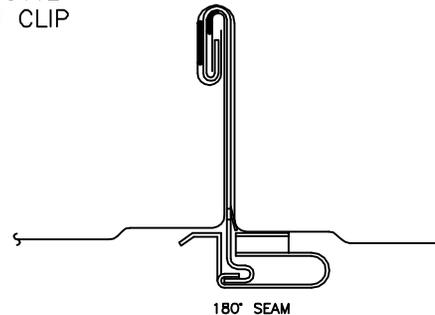

180° SEAM

**INSTALLER NOTE:**  
IF PANELS ARE TO BE CURVED, THEN INSTALLER IS RESPONSIBLE FOR APPLYING THE 3/32" X 3/8" ROLL TAPE SEALANT. IF PANELS ARE BEING USE IN A FLAT APPLICATION, CUSTOMER CAN REQUEST FACTORY APPLIED SEALANT.