



## Flat Sheet / Slit Coil

## Product Data

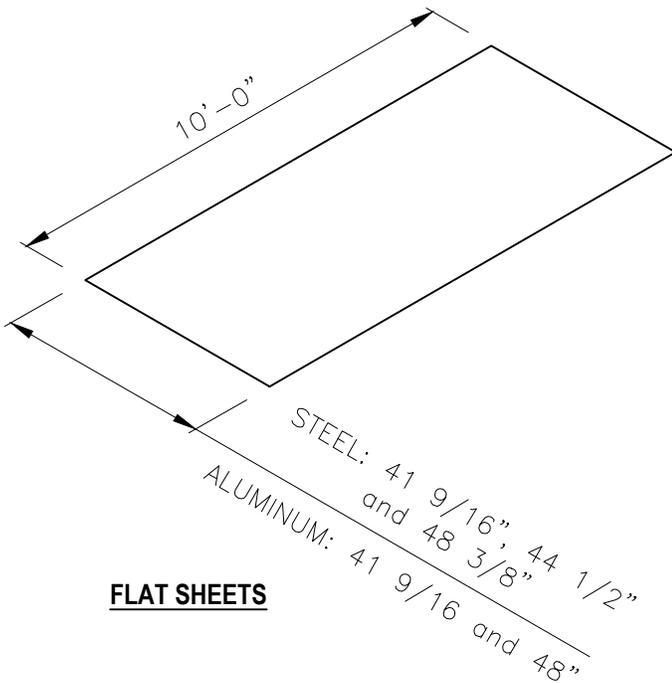

### FLAT SHEETS

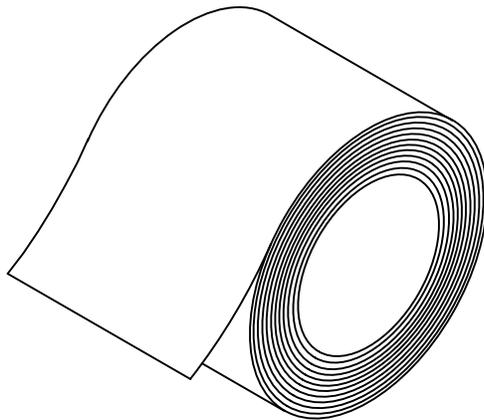

### COIL STOCK

#### Applications

Steel Flat Sheets come in standard lengths of 10'-0" and standard widths of:

- 18 GA. Steel - 44 1/2" ONLY
- 22 thru 26 GA. Steel - 41 9/16", 44 1/2" and 48 3/8"
- 29 GA. Steel - 48 3/8" ONLY

Aluminum Flat Sheets come in standard lengths of 10'-0" and standard widths of:

- 0.032" Aluminum - 41 9/16" and 48"
- 0.040" Aluminum - 48" only

Please contact your McElroy Metal representative for availability per producing plant.

#### Material

- Availability - \*18 GA. ASTM A792 (40 ksi steel) AZ50 - Painted (ONLY)
- \*22 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
  - AZ50 - Painted
  - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
  - AZ50 - Painted
  - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
  - AZ50 - Painted
  - 29 GA. ASTM A792 (37 ksi steel) AZ55 - Bare
  - AZ50 - Painted
  - \*0.032" Aluminum ASTM B209 Alloy 3003 H14
  - \*0.040" Aluminum ASTM B206 Alloy 3003 H14

\*Note: Check Availability with your McElroy Metal Representative.

#### Slit Coil

Master Coil Slitting in the following plants:

- Adelanto, CA
- Clinton, IL
- Houston, TX
- Peachtree City, GA
- Sunnyvale, TX
- Winchester, VA

#### Finishes

- Acrylic Coated Galvalume®
- Fluoropolymer (Kynar 500® PVDF resin-based)
- Siliconized Polyester and Polyester

\*\*Oil canning is inherent in all metal and is not cause for rejection.\*\*

#### NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.